




Material : Phosphor Bronze

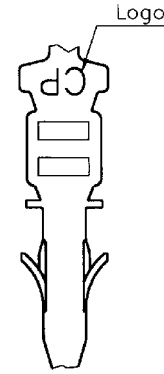

SEC: A-A



SEC: B-B

P/N	Wire Gauge	Insulation Diameter	Finish	Reel Q'TY
CP35T021PEP	AWG #20~#24	2.50 .098 MAX.	2.03µm (80µinch) Min. Tin-lead over 0.76µm (30µinch) Nickel	12,000 PCS
CP35T02APEP	AWG #20~#24	2.50 .098 MAX.	Selective gold flash on surface contract area over 1.27µm (50µinch) Nickel	12,000 PCS
CP35T02BPEP	AWG #20~#24	2.50 .098 MAX.	Selective 0.38µm (15µinch) gold on surface contract area over 1.27µm (50µinch) Nickel	12,000 PCS
CP35T02CPEP	AWG #20~#24	2.50 .098 MAX.	Selective 0.76µm (30µinch) gold on surface contract area over 1.27µm (50µinch) Nickel	12,000 PCS

	4				DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation
	3				DRAWN BY: Sandy	12/24/98	CP35 MALE CRIMP TERMINAL	
	2				ENGINEER: 蔡夏生	12/24/98	MATERIAL:	
	1				CHECKED BY: [Signature]	12/24/98	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: [Signature]	12/24/98	.X ±0.20/.008 X' ± 1"	DRAWING NO. CP3504SB	PART NO. CP35T02*PEP
						.XX ±0.10/.004 X' ±	SCALE 5 / 1	SHEET 1 OF 1
						.XXX ±0.05/.002 .XX ±		